


LNF-ISISISC4_8A



LNF-CICICIC4_8A

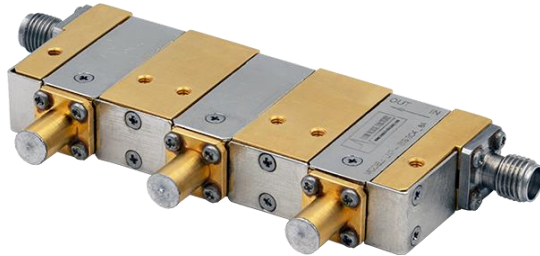

Product features

- RF bandwidth: 4-8 GHz
- Insertion loss @3K: 0.4 dB typical
- Insertion loss @77K: 0.5 dB typical
- Isolation: 60 dB typical
- Port match: 22 dB typical
- RF-connectors: SMA

Product description

The LNF-xxxxxxC4_8A is an ultra-low insertion loss cryogenic triple junction isolator/circulator operating in the 4-8 GHz frequency range. It has been designed from ground up to meet the strict requirements of ultra-low temperature physics research. The gold plated OFHC copper body ensures minimum loss and that this loss reaches the lowest possible temperature to minimize thermal noise. The isolator/circulator is packaged in a slim coaxial module using industry standard SMA connectors. The module measures 67.1*24.6*10.2 mm excluding the connectors.



Absolute maximum ratings

Parameter	Min	Max
RF drive level		30 dBm
DC voltage on RF input and output	-50V	50V


Typical RF Characteristics at 77 K

Parameter	Condition	Value	Unit
Insertion loss	4-8 GHz	0.4	dB
Isolation	4-8 GHz	60	dB
Port match	4-8 GHz	22	dB

Measured typical data $T_{amb}=77\text{ K}$

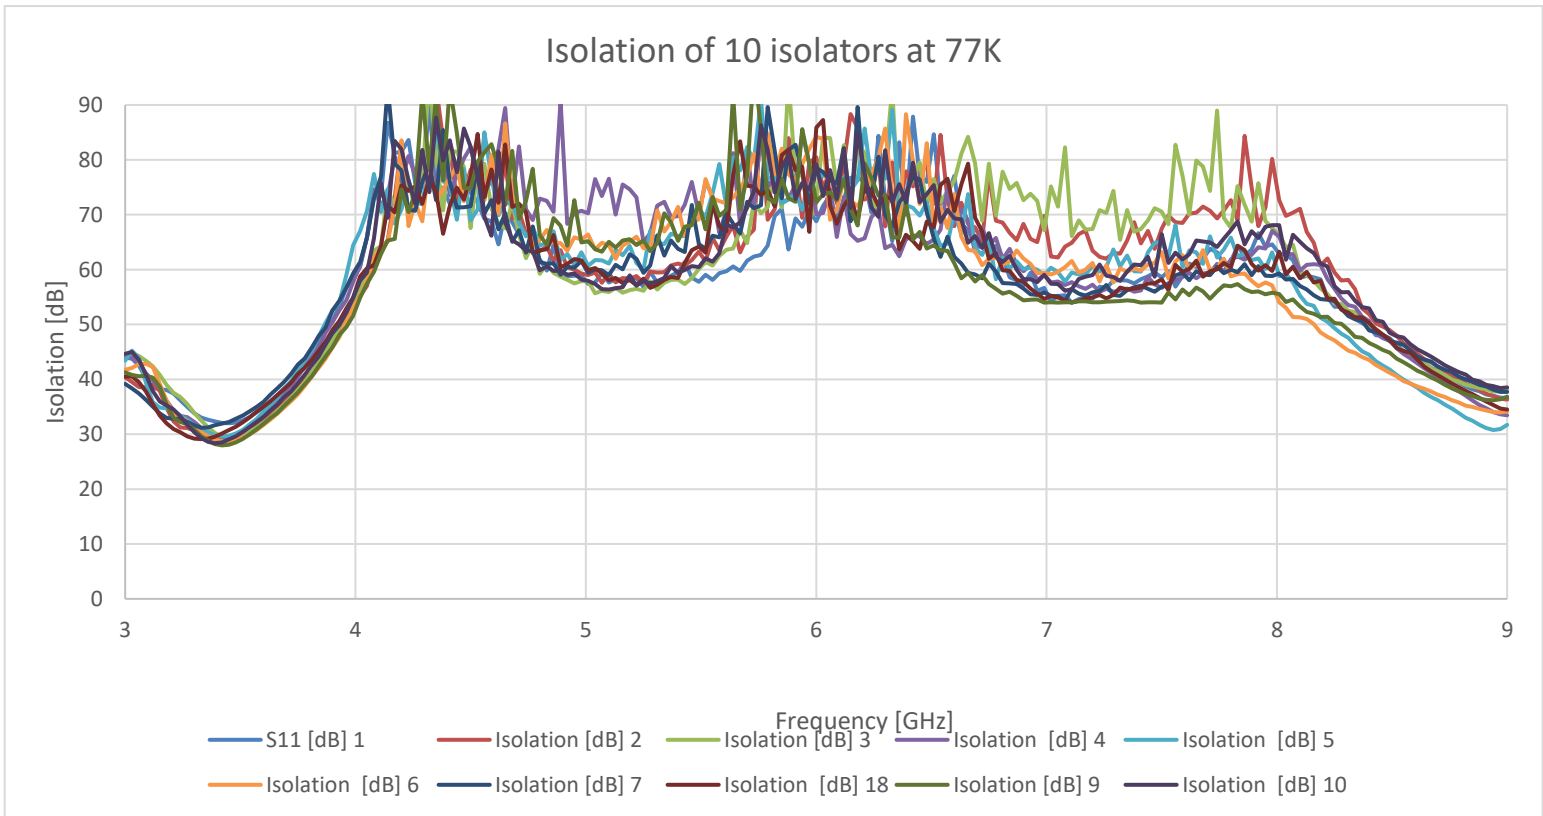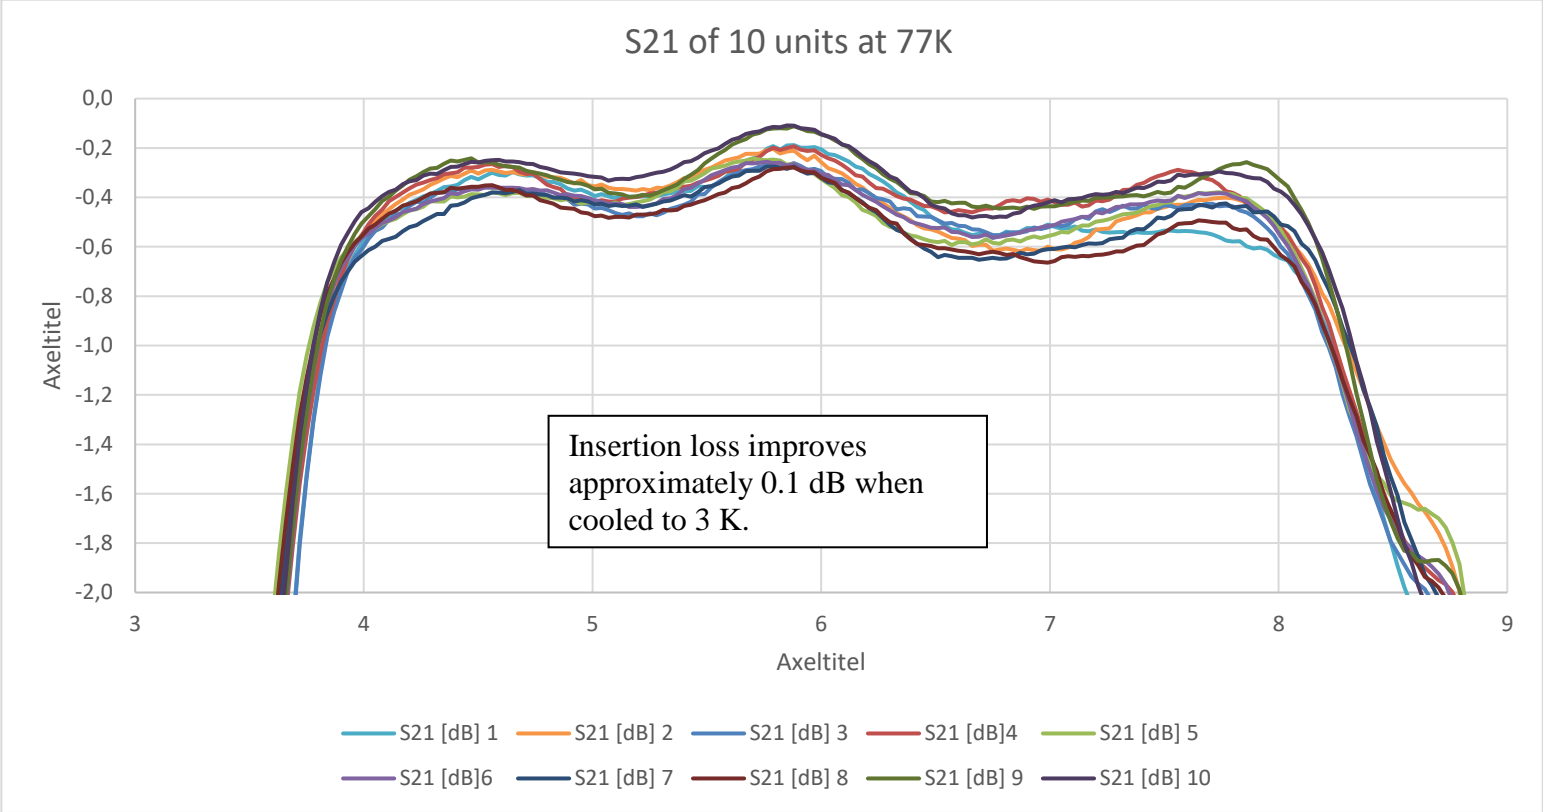

Port match of 10 isolators at 77K

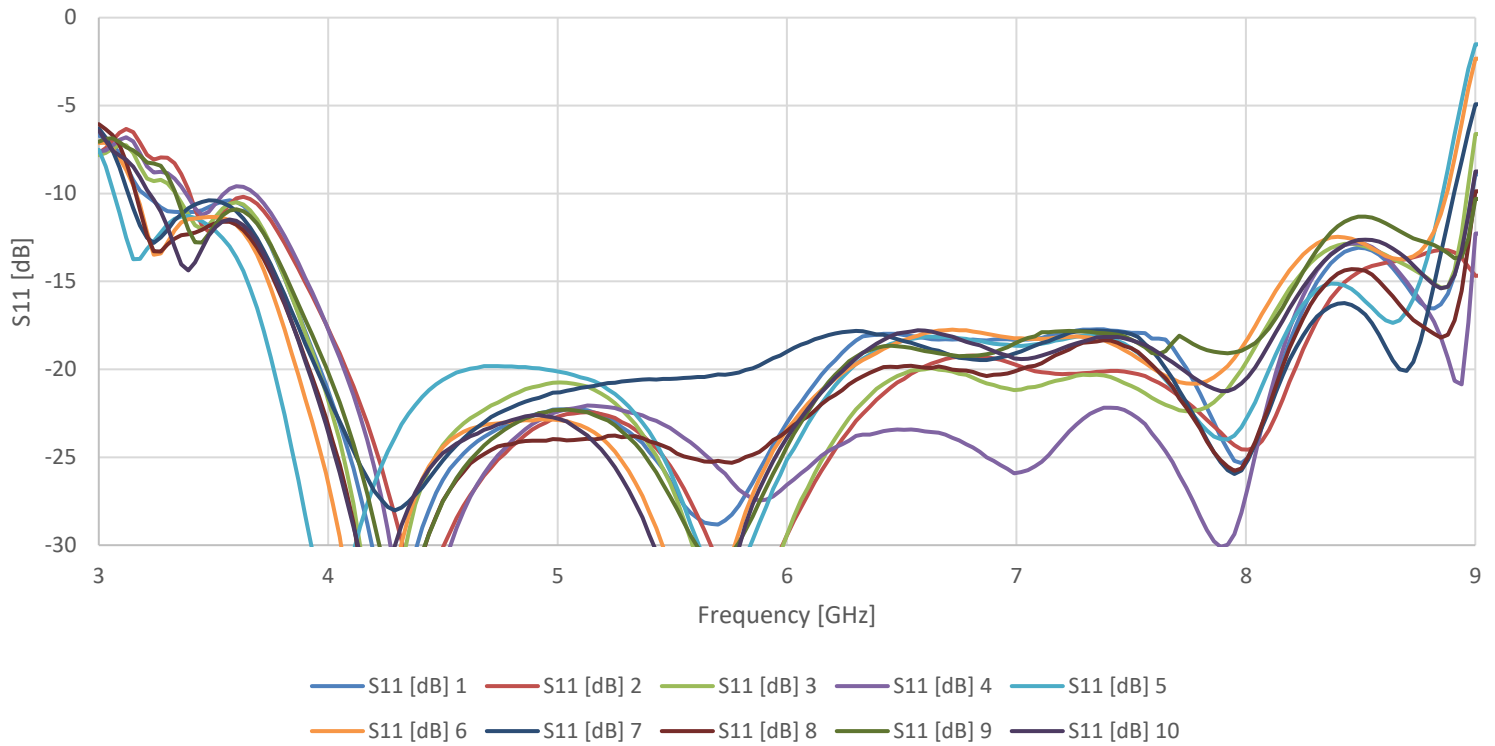

Magnetic flux density generated by internal magnet


Parameter	Condition	Value	Unit
Magnetic flux density with standard shielding*	6 mm from chassis	<4	Gauss
Magnetic flux density with optional shielding	6 mm from chassis	<0.1	Gauss

- This is the magnetic field generated by the internal magnet inside the isolator/circulator chassis, which potentially may influence nearby components.
- Two isolators/circulators can be placed 3.3 mm apart without interfering with each other.


Maximum external magnetic field imposed on the isolator

Parameter	Condition	Value	Unit
Maximum perpendicular external magnetic field	At chassis	650	Gauss
Maximum parallel external magnetic field	At chassis	1000	Gauss

- “Maximum field” means the field when the passband frequency edge has shifted 150 MHz, and insertion loss degradation becomes noticeable.
- The optional MuMetal shield improves the maximum external magnetic field very little. MuMetal alloys are good at shielding very low level “stray” magnetic fields, however the material saturates quickly and doesn’t shield well against high field external sources

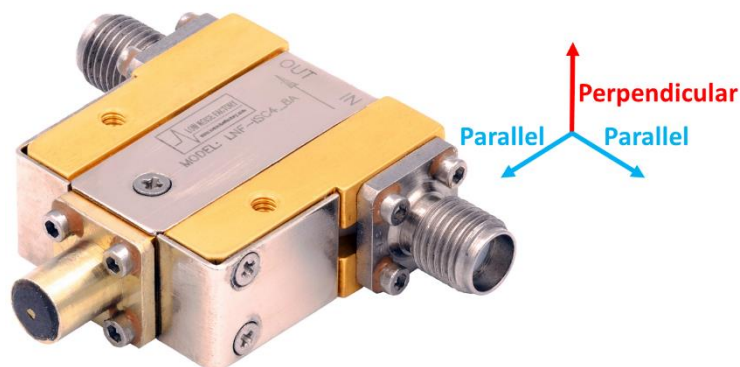


Drawing without additional shielding

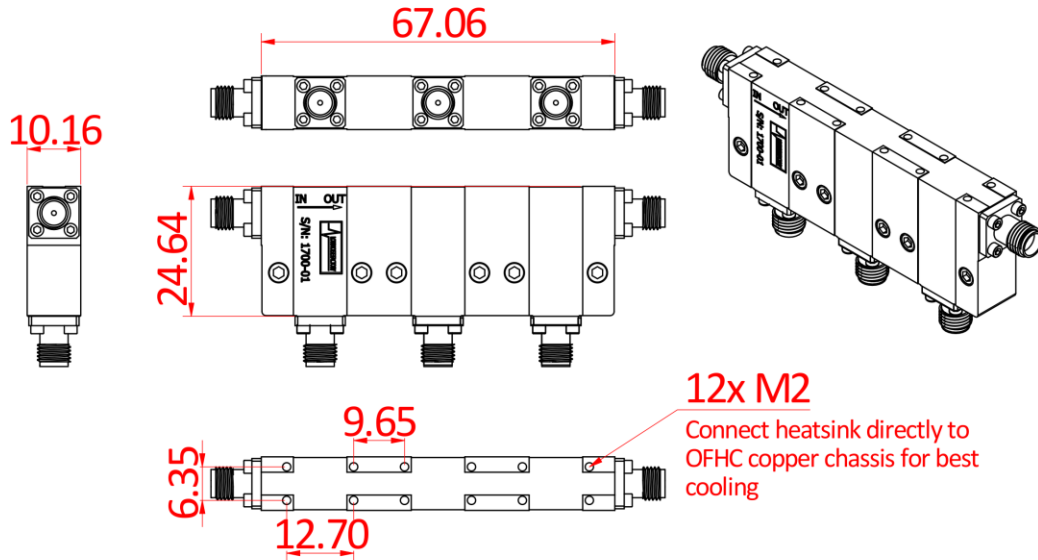


Dimensions are in millimeters

Drawing with additional shielding

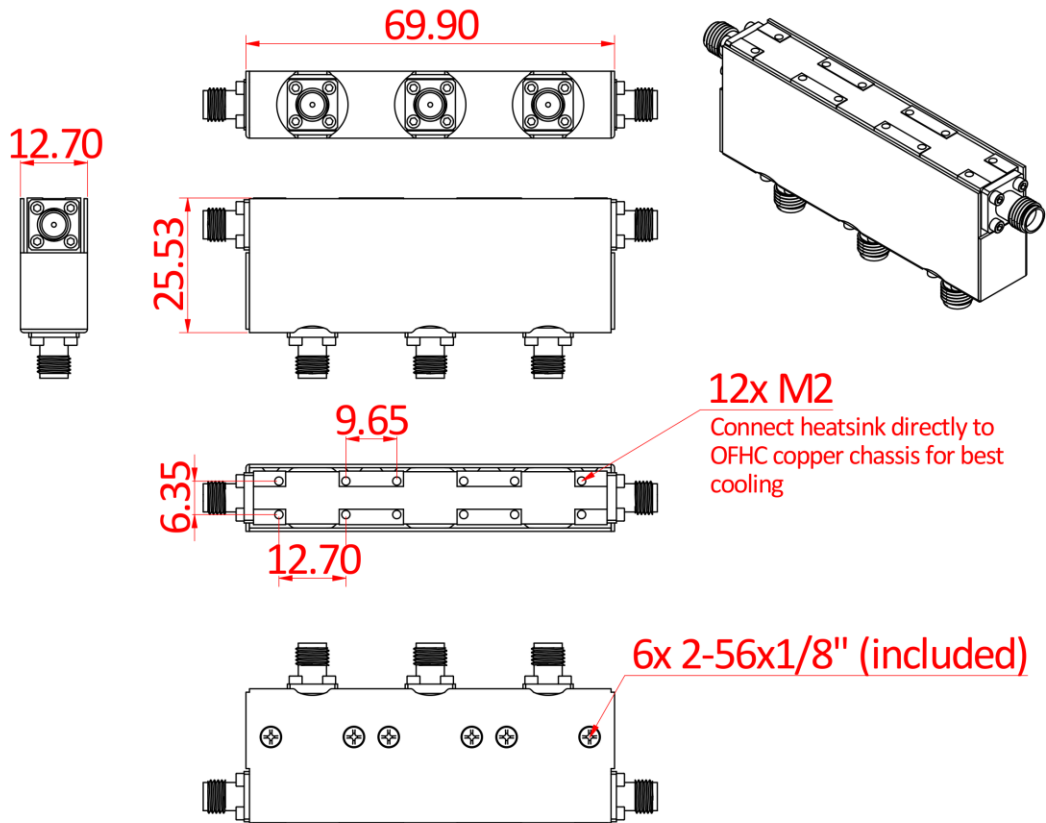

Dimensions are in millimeters


Model numbering

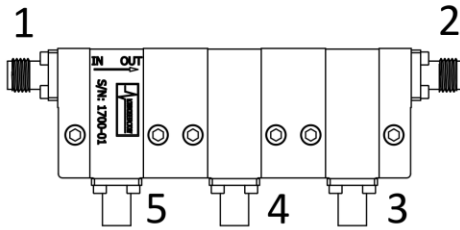

LNF-ISISISC4_8A

Triple Junction Isolator-Isolator-Isolator


- Port 1: Female SMA
- Port 2: Female SMA
- Port 3: Termination
- Port 4: Termination
- Port 5: Termination

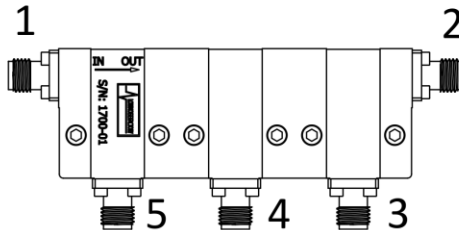

LNF-CICICIC4_8A

Triple Junction Circulator-Circulator-Circulator


- Port 1: Female SMA
- Port 2: Female SMA
- Port 3: Female SMA
- Port 4: Female SMA
- Port 5: Female SMA

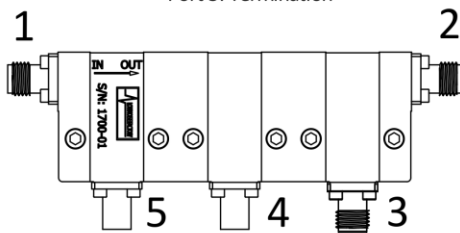

LNF-ISISCIC4_8A

Triple Junction Isolator-Isolator-Circulator

- Port 1: Female SMA
- Port 2: Female SMA
- Port 3: Female SMA
- Port 4: Termination
- Port 5: Termination

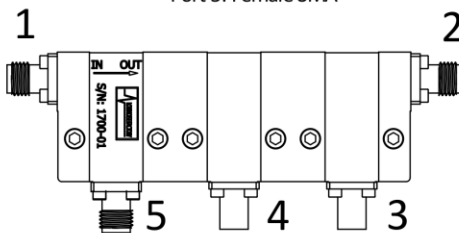


LNF-CIISISC4_8A

Triple Junction Circulator-Isolator-Isolator

- Port 1: Female SMA
- Port 2: Female SMA
- Port 3: Termination
- Port 4: Termination
- Port 5: Female SMA

Version	Model number
Triple Isolator	LNF-ISISISC4_8A
Triple Circulator	LNF-CICICIC4_8A
Isolator-Isolator-Circulator	LNF-ISISCIC4_8A
Circulator-Isolator-Isolator	LNF-CIISISC4_8A
Extra shield	LNF-SHIELD4_8_TJ

Array

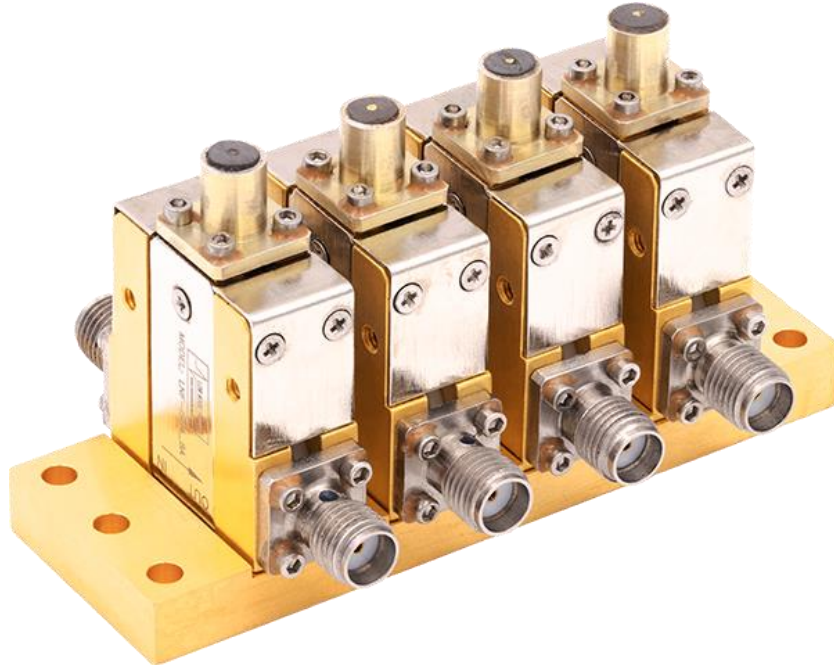

Please consult with factory for array options