



Product features

- RF bandwidth: 4-16 GHz
- Noise Temperature: 3.7 K typical
- Noise Figure: 0.055 dB typical
- Gain: 43 dB
- DC-power: $V_d=0.70$ V, $I_d=14$ mA
- One gate and one drain supply only
- RF-connectors: Male G3PO
- DC-connector: 5-pin female strip connector
- Stackable: 140 mil pitch

Product description

LNF-LNC4_16SB is a slim and stackable version of our very popular ultra-low noise cryogenic 4-16 GHz amplifier. The LNA is packaged in a module using Corning Gilbert G3PO coaxial connectors and a 5-pin strip DC connector. The lightweight gold plated aluminum module measures only 19.80*20.80*3.556 mm.

The LNA is stackable with a 140 mil pitch, suitable for Corning Gilbert G3PO multi-position blocks.

Absolute maximum ratings

Parameter	Min	Max
V_{ds}	-0.5 V	3 V
I_{ds}		100 mA
V_{gs}	-20 V	+20 V
RF Input drive level		-10 dBm
DC voltage on RF input and output	-30V	30V


Typical RF Characteristics

Parameter	Test Condition	Value	Unit
Gain	4-16GHz	43	dB
Noise	4-16 GHz	4.3	K
IRL	4-16 GHz	12	dB
ORL	4-16 GHz	20	dB
P_{1dB}	10 GHz	-12	dBm
OIP3	10 GHz	-2	dBm



Typical DC Characteristics

Parameter	Value	Unit
V_{ds}	0.7	V
I_{ds}	14	mA
V_{gs}	+0.4	V
I_{gs}	36	μ A
P_{dc}	9.8	mW


Measured typical data $T_{amb}=5\text{ K}$

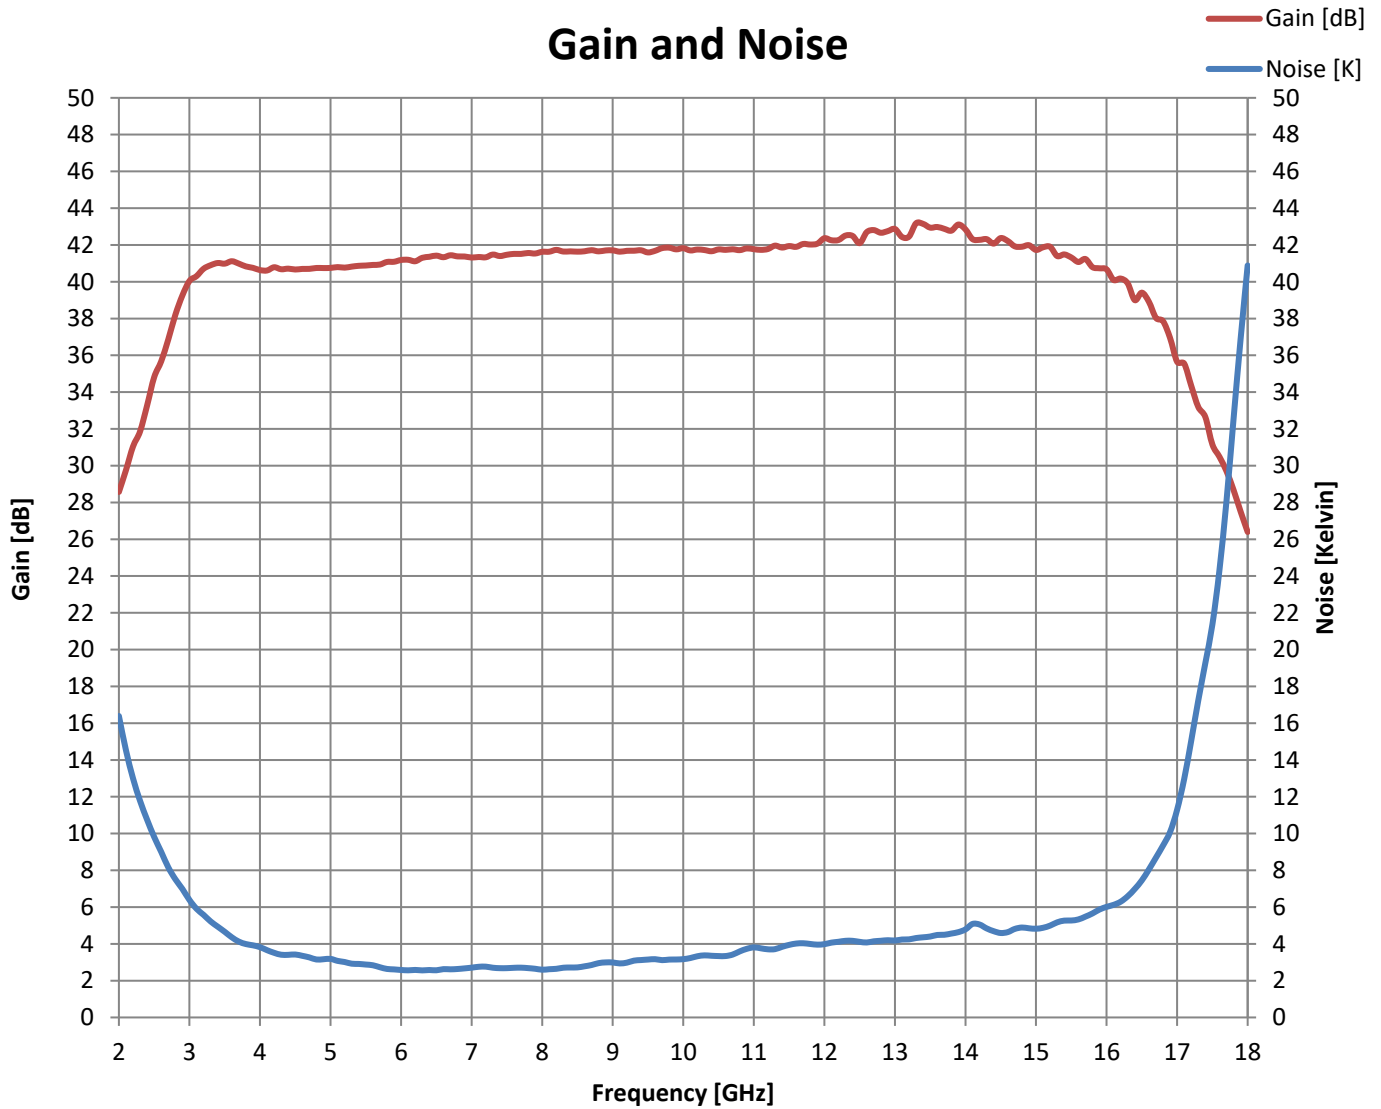

Measured typical data @ $T_{amb}=296$ K

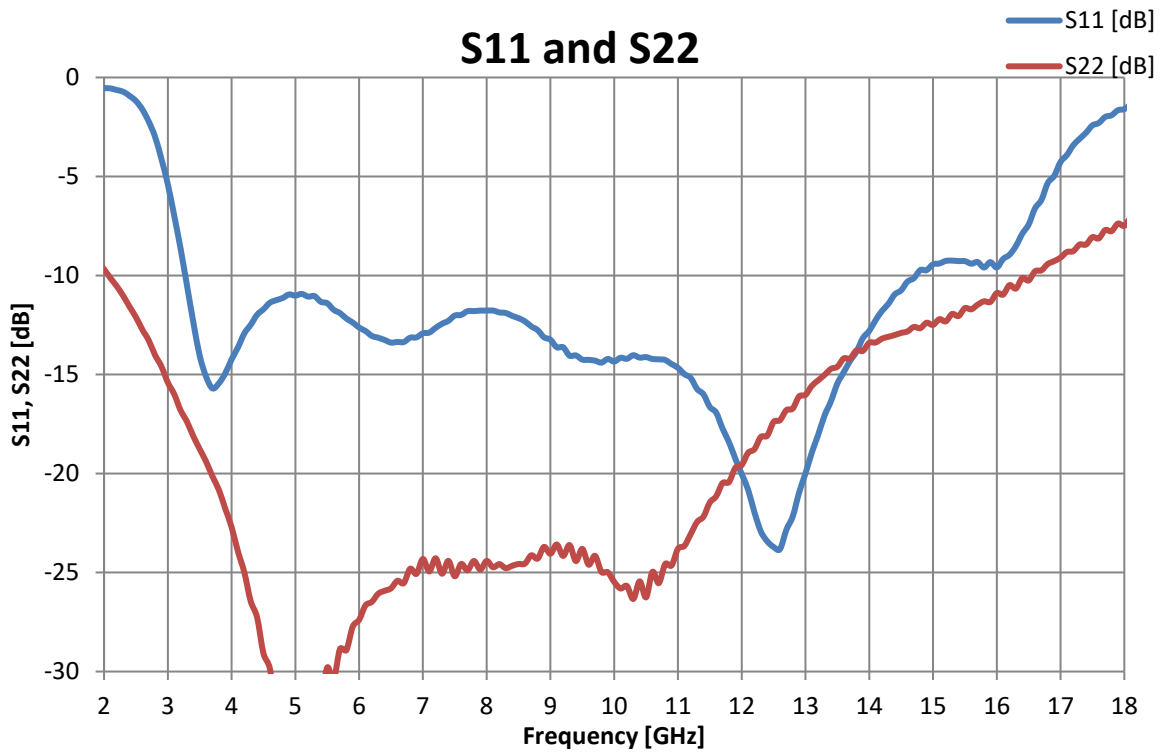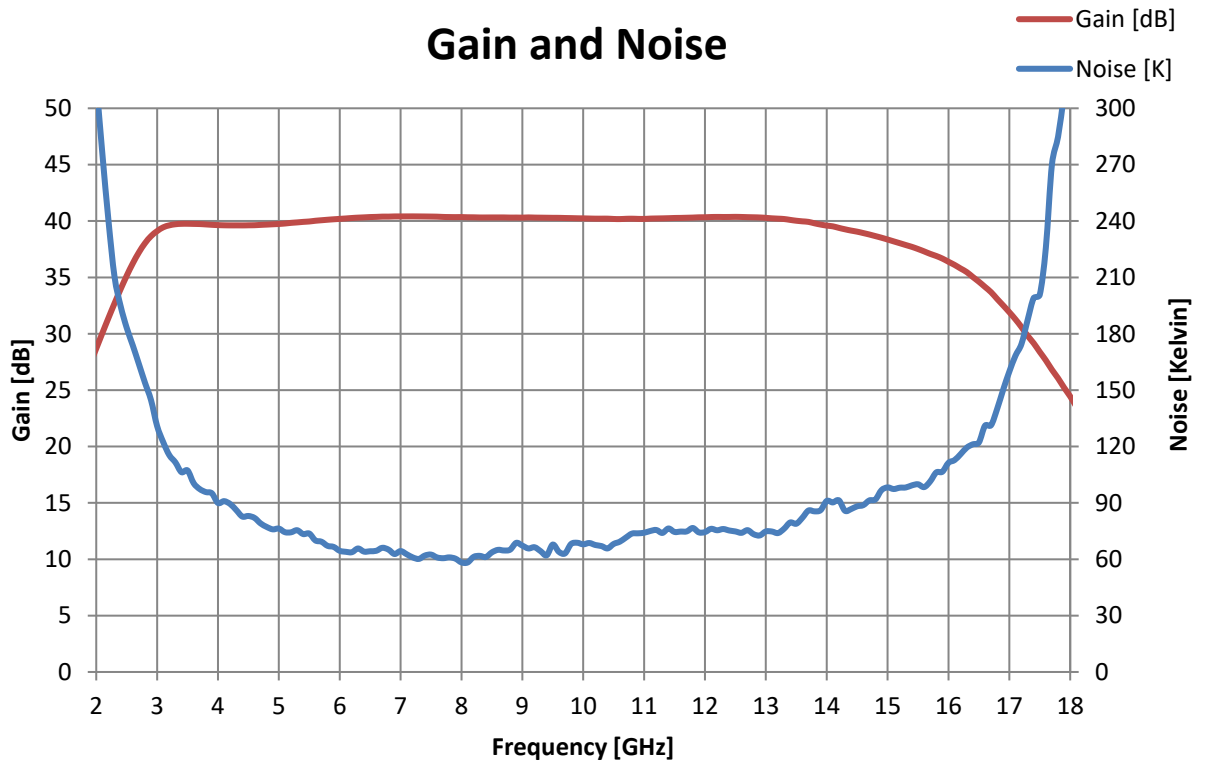

Drawings

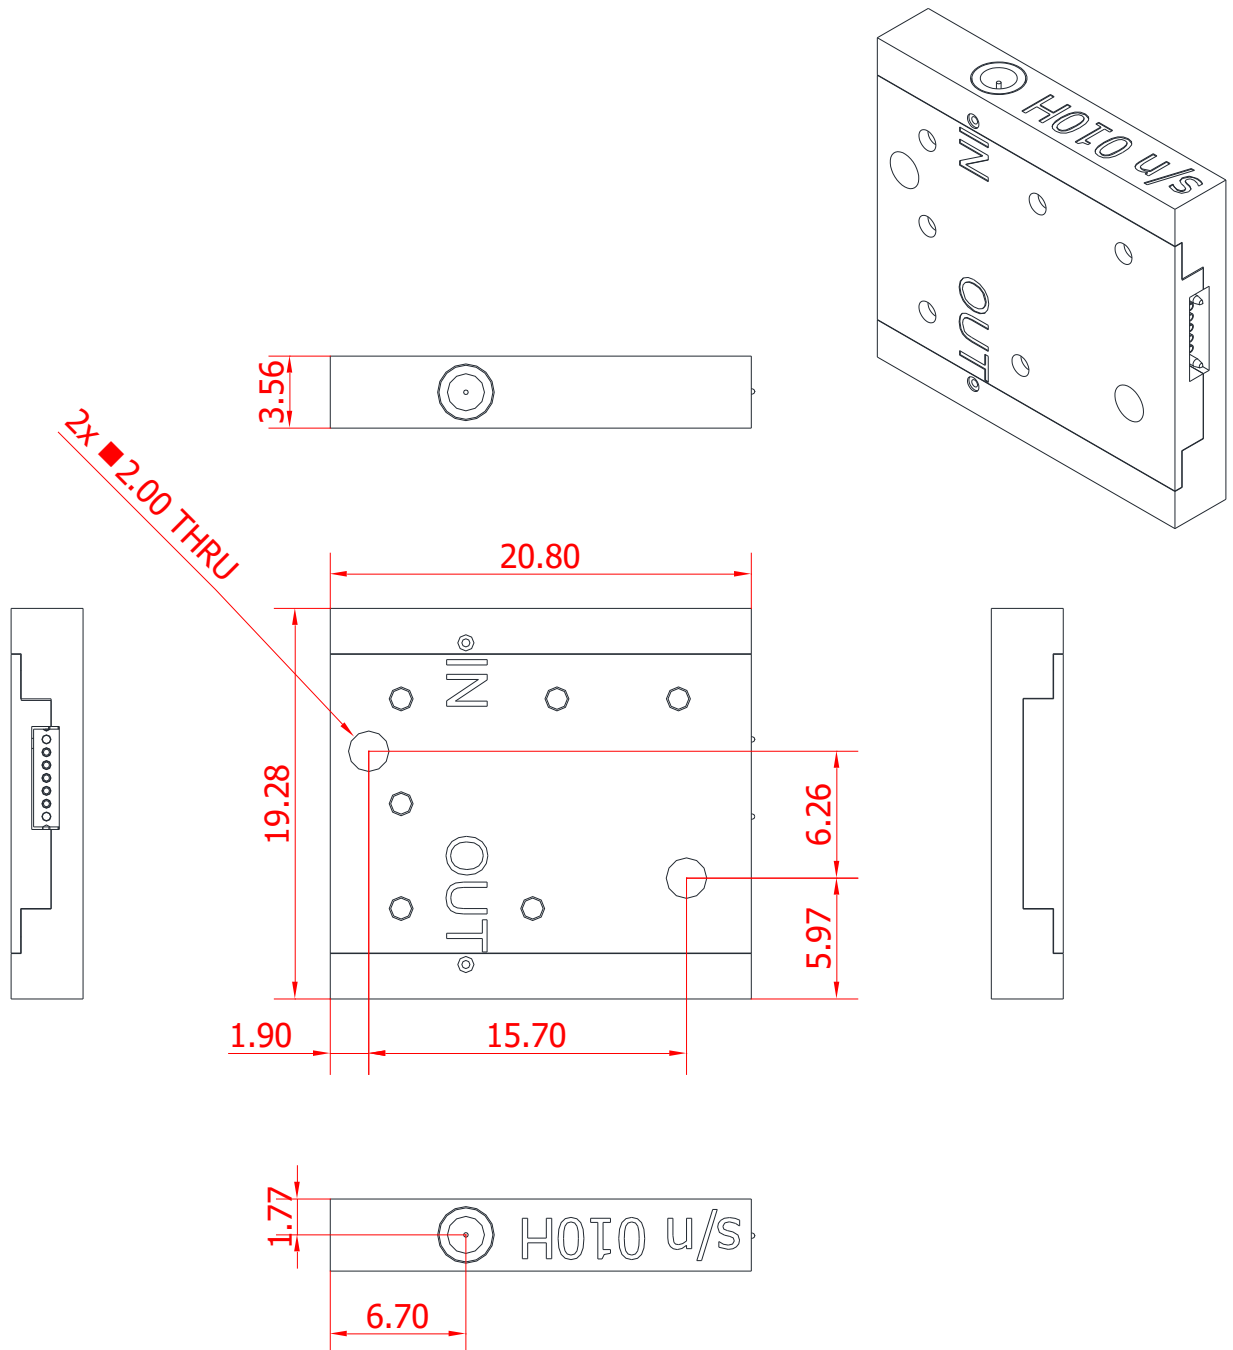

Dimensions are in millimeters